

MATERIAL OF CONSTRUCTION

BODY : B.S. 1400 AB2C/
 G.M. IS318/
 BRASS : I.S.319


SPECIFICATION :

FLUID HANDLE : SALT WATER
 OPERATING PRESSURE : 10.6Kg/cm²
 DESIGN PRESSURE : 14.0 Kg/cm²
 DESIGN TEMPERATURE : 65°C
 NORMAL SALT WATER TEMP. : 16°C-40°C
 TAG NO. : SHALL BE PUNCHED ON FACE OF THE NOZZLES

NOTE : NOZZLE BORE AND 'K' FACTOR IS SELECTED BY CONSIDERATION OF MIN. PRESSURE OF 1.4 Kg/cm² g.
 $Q = KX\sqrt{P}$

DIMENSION in meters (Approximate)

'K'FACTOR	A IN MTRS. APPROX.	B IN MTRS. APPROX.
18	08	09
23	09	10
30	11	12
38	11	12
45	12	13
53	13	14
70	14	15

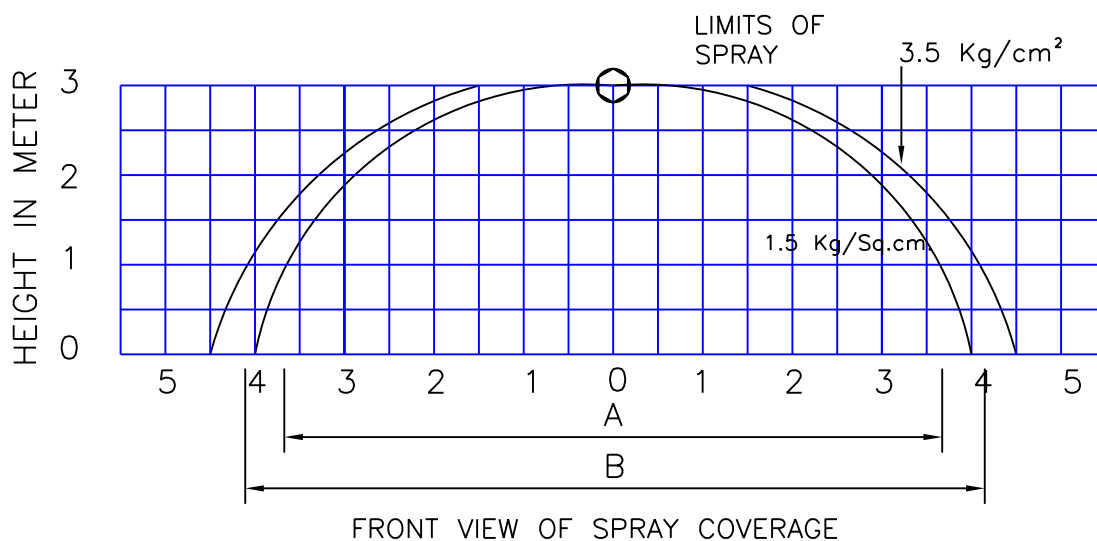

EVERSAFE
 PROTECTION

WATER CURTAIN NOZZLE

DATA SHEET.NO.

704-1